

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 October 2001 (25.10.2001)

PCT

(10) International Publication Number
WO 01/80477 A1

(51) International Patent Classification⁷: **H04L 1/18**, 1/16

(21) International Application Number: PCT/US01/12227

(22) International Filing Date: 13 April 2001 (13.04.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/549,017 14 April 2000 (14.04.2000) US

(71) Applicant: **QUALCOMM INCORPORATED** [US/US];
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).

(72) Inventors: **JALALI, Ahmad**; 5624 Willowmere Lane,
San Diego, CA 92130 (US). **ESTEVEZ, Eduardo, A., S.**;
12063 Alta Carmel Court, Unit 161, San Diego, CA 92128 (US). **SINDHUSHAYANA, Nagabhushana, T.**;
7794 Roan Road, San Diego, CA 92129 (US). **BLACK, Peter, J.**;
2961 First Avenue, San Diego, CA 92103 (US). **ATTAR, Rashid, A.**;
8520 Costa Verde Boulevard, Apt. 3112, San Diego, CA 92122 (US).

(74) Agents: **WADSWORTH, Philip, R.** et al.; Qualcomm Incorporated,
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A METHOD AND AN APPARATUS FOR A QUICK RETRANSMISSION OF SIGNALS IN A COMMUNICATION SYSTEM

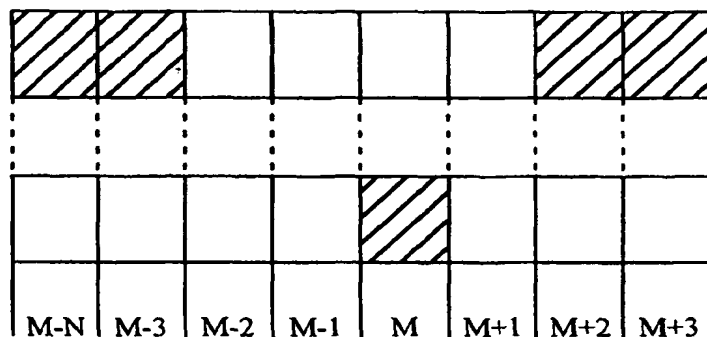

(57) Abstract: A transmitting terminal, transmits signals in a form of packets to a receiving terminal, if the packet was intended for the receiving terminal, if so, the receiving terminal demodulates the packet. The receiving terminal then computes a quality metric of the packet, and compares the computed quality metric with a quality metric contained in the packet. If the quality metrics match, the packet is forwarded for further processing. If the quality metrics fail to match, the receiving terminal sends a request for retransmission of the packet. The transmitting terminal determines which packet needs to be retransmitted based on the request for retransmission. If delivery of the packet in accordance with the aforementioned description fails, retransmission in accordance with conventional sequence-number-based schemes, e.g., radio link protocol, is attempted.

WO 01/80477 A1

A METHOD AND AN APPARATUS FOR A QUICK RETRANSMISSION OF SIGNALS IN A COMMUNICATION SYSTEM

5

BACKGROUND OF THE INVENTION

I. Field of the Invention

The current invention relates to communication. More particularly,
the present invention relates to a novel method and apparatus for quick
10 retransmission of signals in a communication system.

II. Description of the Related Art

In a communication system, a communication channel through
15 which signals travel between transmitting and receiving terminals is subject
to various factors, changing characteristics of the communication channel.
In wireless communication systems these factors comprise, but are not
limited to: fading, noise, interference from other terminals, and the like.
Consequently, despite extensive error control coding, certain packets are
20 missed or received erroneously at a receiving terminal. Unless defined
differently, a packet is a unit of a signal comprising a preamble, a payload,
and a quality metric. Therefore, Automatic Retransmission reQuest (ARQ)
schemes are often used at the link layer of communication systems to detect
missing or erroneously received packets at the receiving terminal, and
25 request retransmission of these packets at the transmitting terminal. An
example of an ARQ is a Radio Link Protocol (RLP). RLP is a class of error
control protocols known as NAK-based ARQ protocols, which are well
known in the art. One such RLP is described in TIA/EIA/IS-707-A.8, entitled
"DATA SERVICE OPTIONS FOR SPREAD SPECTRUM SYSTEMS: RADIO
30 LINK PROTOCOL TYPE 2", hereinafter referred to as RLP2, and incorporated
herein by reference.

Existing ARQ schemes achieve retransmission of missing or
erroneously received packets by utilizing a sequence number unique to each
packet. When a receiving terminal detects a packet with a sequence number
35 higher than an expected sequence number, the receiving terminal declares
packet(s) with sequence number(s) between the expected sequence number
and the detected packet's sequence number missing or erroneously received.
The receiving terminal then sends a control message requesting

retransmission of the missing packets to a transmitting terminal. Alternatively, the transmitting terminal may resend the packet after a certain time out interval if the transmitting terminal has not received a positive acknowledgement from the receiving terminal.

5 Consequently, existing ARQ schemes cause a large delay between the first transmission of a packet and a subsequent retransmission. The ARQ does not declare a particular packet missing or erroneously received until the next packet, containing a sequence number higher than an expected sequence number is received or until the time out interval expires. This
10 delay results in a large variance in the end to end delay statistics, which has a further detrimental effect on the network throughput. Transport layer protocols such as the transport control protocol (TCP) implement a congestion control mechanism, which reduces the number of outstanding packets in a network based on the variance of the round-trip delay estimate.
15 In effect, larger variance of delay results in a reduction of the amount of traffic that is admitted into the network and a subsequent reduction in throughput of a communication system.

One approach to reducing the delay and the delay's variation is to avoid retransmissions by ensuring that the first transmission is received
20 correctly with high probability. However, this approach requires a large amount of power, which in turn reduces throughput.

Based on the foregoing, there exists a need in the art for an ARQ mechanism with low retransmission delay.

25 SUMMARY OF THE INVENTION

The present invention is directed to a method and an apparatus for quick retransmission (QARQ) of signals in a communication system.

In accordance with one aspect of the invention, a receiving terminal
30 determines a quality metric of a packet of received signal. The receiving terminal immediately sends a short acknowledgement (SA) to a transmitting terminal in accordance with the quality metric of the packet. If the quality metric indicates that the packet was incorrectly received, then the SA is termed negative acknowledgement (NAK); otherwise, the SA is
35 termed positive acknowledgement (ACK) or acknowledgement.

In another aspect of the invention, there exists a determinable relationship between a particular packet and the SA; therefore, there is no

need for the SA to contain an explicit indication as to which packet is to be retransmitted.

In accordance with another aspect of the invention, the SA is a bit of energy.

5 In accordance with another aspect of the invention, the transmitting terminal attempts retransmission of the packet a predetermined number of times.

In accordance with yet another aspect of the invention, a conventional, sequence-number-based ARQ is employed together with the
10 QARQ scheme.

BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, and advantages of the present invention will
15 become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:

FIG. 1 is a block diagram of an exemplary communication system.

FIG. 2 is an illustration of an exemplary forward link signal structure.

20 FIG. 3 is a flowchart of an exemplary method of data processing at the transmitting terminal.

FIG. 4 is a flowchart of an exemplary method of data processing at a receiving terminal.

FIG. 5 is a detailed block diagram of the communication system of
25 FIG. 1.

FIG. 6 is a diagram showing timing associated with packet processing at a receiving terminal in accordance with an embodiment of the invention.

30 DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

FIG. 1 illustrates an exemplary communication system 100 capable of implementing embodiments of the invention. A first terminal 104 transmits signals to a second terminal 106 over a forward link 108a, and
35 receives signals from the second terminal 106 over a reverse link 108b. The communication system 100 can be operated bi-directionally, each of the terminals 104 and 106 operating as a transmitter unit or a receiver unit, or both concurrently, depending on whether data is being transmitted from, or

received at, the terminal. In a wireless cellular communication system embodiment, the first terminal 104 can be a base station (BS), the second terminal 106 can be a mobile station (MS) such as a phone, a laptop computer, a personal digital assistant and the like. The forward link and
5 reverse link can be electromagnetic spectra.

In general, a link comprises a set of channels carrying logically distinct types of information. These channels can be transmitted according to a time division multiplex (TDM) scheme, a code division scheme (CDM), or a combination of the two. In the TDM scheme, the channels are distinguished
10 in time domain. The forward link consists of time slots in a periodic train of time intervals, and the channels are transmitted in the time slots. Consequently, the channels are transmitted one at a time. In the code division scheme, the channels are distinguished by a pseudorandom orthogonal sequence; consequently, the channels can be transmitted
15 simultaneously. A code division scheme is disclosed in U.S. Patent Serial No. 5,103,459, entitled "SYSTEM AND METHOD FOR GENERATING SIGNAL WAVEFORMS IN A CDMA CELLULAR TELEPHONE SYSTEM" assigned to the assignee of the present application and incorporated by reference herein.

In one embodiment of the invention, a forward link comprises a set of channels, e.g., a pilot channel, a medium access channel, a traffic channel, and a control channel. The control channel is a channel carrying signals to be received by all MSs monitoring the forward link. In one embodiment of the invention, data being carried on the traffic channel, including both first
25 time transmissions and quick retransmissions, can be demodulated without information provided on a control channel. In another embodiment, the control channel may carry information necessary for demodulation of the data being carried on the traffic channel. For a forward link signal structure of an exemplary embodiment of the invention, refer to FIG. 2.

In one embodiment of the invention, the reverse link comprises a set of channels, e.g., a traffic channel and an access channel. The reverse traffic channel is dedicated to transmission from a single MS to the BSs comprising a network. The reverse access channel is used by the MSs to communicate with the BSs in the network when the MSs do not have traffic channel.

35 For simplicity, communication system 100 is shown to include one BS 104 and one MS 106 only. However, other variations and configurations of the communication system 100 are possible. For example, in a multi-user, multiple access communication system, a single BS may be used to

concurrently transmit data to a number of MSs. In addition, in a manner similar to soft-handoff, disclosed in U.S. Patent Serial No. 5,101,501, entitled "SOFT HANDOFF IN A CDMA CELLULAR TELEPHONE SYSTEM," assigned to the assignee of the present application and incorporated by reference herein, a MS may concurrently receive transmissions from a number of BSs. The communication system of the embodiments described herein may include any number of BSs and MSs. Consequently, each of the multiple BSs is connected to a base station controller (BSC) 102 through a backhaul similar to backhaul 110. The backhaul 110 can be implemented in a number of connection types including, e.g., a microwave or wire-line E1 or T1, or optical fiber. A connection 112 connects the wireless communication system 100 to a public switched data network (PSDN), which is not shown.

In an exemplary embodiment, each MS monitors signal quality metric of signals received from BSs. A MS (for example MS 106) receiving forward link signals from multiple BSs identifies the BS associated with the highest quality forward link signal (for example BS 104). The MS 106 then generates a prediction of a data rate at which the packet error rate (PER) of packets received from the selected BS 104 will not exceed a target PER. An exemplary embodiment uses a target PER of approximately 2%. The MS 106 then computes a rate at which a "tail probability" is greater than or equal to the target PER. The tail probability is the probability that the actual signal quality during the packet transmission period is less than the signal quality required for successful decoding of a packet correctly at a given rate. The MS 106 then sends a message on the reverse link specifically to the selected BS 104, requesting data rate at which the specific selected base station may transmit forward link data to the MS 106.

In one embodiment of the invention, the message is sent on a data rate control channel (DRC). DCR is disclosed in a co-pending application serial number 08/963,386 entitled: "A METHOD AND AN APPARATUS FOR HIGH RATE DATA TRANSMISSION," assigned to the assignee of the present invention, and incorporated herein by reference.

In another embodiment of the invention, a dedicated reverse link medium access channel (R-MACCH) is utilized. The R-MACCH carries the DRC information, a reverse rate indicator (RRI) and a SA information.

In an exemplary embodiment, the BS 104 monitors the reverse channel from one or more MSs and transmits data on forward link to no more than one destination MS during each forward link transmit time slot. The BS 104 selects a destination MS (for example MS 106) based on a

scheduling procedure designed to balance the grade of service (GoS) requirements of each MS with the desire to maximize throughput of the system 100. In an exemplary embodiment, the BS 104 transmits data to the destination MS 106 only at the rate indicated by the most recent message
5 received from the destination MS. This restriction makes it unnecessary for the destination MS 106 to perform rate detection on the forward link signal. The MS 106 need only determine whether it is the intended destination MS during a given time slot.

In an exemplary embodiment, BSs transmit a preamble within the
10 first time slot of each new forward link packet. The preamble identifies the intended destination MS. Once a destination MS establishes that it is the intended destination for data in a slot, the MS begins decoding the data in the associated time slot. In an exemplary embodiment, the destination MS 106 determines the data rate of the data in the forward link based on the
15 request message the MS 106 sent. The number of forward link time slots used to transmit a packet varies based on the data rate at which the packet is sent. Packets sent at a lower rate are sent using a greater number of time slots.

Once the MS 106 determines that the data are intended for the MS 106,
20 the MS 106 decodes the packet and evaluates a quality metric of the received packet. Quality metric of a packet is defined by a formula in accordance with a content of the packet, e.g., a parity bit, a cyclic redundancy check (CRC), and the like. In one embodiment of the invention, the quality metric is a CRC. The evaluated quality metric and the quality metric contained in the
25 received packet are compared, and based on the comparison an appropriate SA is generated. As discussed with reference to FIG. 5, the SA in an exemplary embodiment can comprise only one bit.

In one embodiment, the SA is ACK based, i.e., an ACK message is sent from a MS to a BS if a packet is correctly decoded and no message is sent if
30 the packet is incorrectly decoded.

In another embodiment the SA is NAK based, i.e., a NAK message is sent from a MS to a BS if a packet is incorrectly decoded and no message is sent if the packet is correctly decoded. An advantage of this approach is that high reliability and low noise interference with other reverse links, as well
35 as energy saving at the MS can be achieved. As discussed, because a BS is transmitting a packet intended to only one MS, at most this MS sends NAK, thus achieving a low interference on the reverse link. In a well-designed system, the probability of the MS incorrectly decoding the packet is low.

Furthermore, if the NAK is a bit of zero energy, the NAK contains low energy. Therefore, the MS can allocate large amount of power to the infrequent transmission of the NAK bit, guaranteeing.

In yet another embodiment, an ACK is a first value of energy and a
5 NAK is a second value of energy.

The SA is then sent to the BS 104 over a channel on the reverse link 108b. In one embodiment of the invention, the reverse link channel is a DRC.

In another embodiment of the invention, a code channel orthogonal
10 to the reverse link can be advantageously utilized. Because a BS is transmitting a packet intended for only one MS, at most this MS sends a SA, thus achieving a low interference on the reverse link. In a well-designed system, the probability of the MS incorrectly decoding the packet is low. Furthermore, if the SA is an ACK as a bit of zero energy or a NAK as a bit of
15 zero energy, the orthogonal channel contains low energy. Therefore, the MS can allocate large amount of power to the infrequent transmission of the SA bit, guaranteeing high reliability and low interference with the reverse link.

In yet another embodiment of the invention, a dedicated reverse link medium access channel (R-MACCH) is utilized. The R-MACCH carries the
20 DRC, the RRI and the ACK/NAK information.

The BS 104 detects the SA and determines whether a retransmission of the packet is necessary. If the SA indicates that a retransmission is necessary, the packet is scheduled for retransmission, otherwise, the packet is discarded.

25 In an exemplary embodiment, the aforementioned QARQ scheme cooperates with the RLP as will be disclosed in following description.

FIG. 2 shows the forward link signal structure transmitted by each base station in an exemplary high data rate system. Forward link signals are divided into fixed-duration time slots. In an exemplary embodiment, each
30 time slot is 1.67 milliseconds long. Each slot 202 is divided into two half-slots 204, with a pilot burst 208 transmitted within each half-slot 204. In an exemplary embodiment, each slot is 2048 chips long, corresponding to a 1.67 millisecond slot duration. In an exemplary embodiment, each pilot burst 208 is 96 chips long, and is centered at the mid-point of its associated half-slot
35 204. A reverse link power control (RPC) signal 206 is transmitted to either side of the pilot burst in every second half-slot 204b. In an exemplary embodiment, the RPC signal is transmitted in the 64 chips immediately before and the 64 chips immediately after the second pilot burst 208b of each

slot 202, and is used to regulate the power of the reverse link signals transmitted by each subscriber station. In an exemplary embodiment, forward link traffic channel data are sent in the remaining portions of the first half-slot 210 and the remaining portions of the second half-slot 212. In an exemplary embodiment, preamble 214 is 64 chips long and is transmitted with each packet. Because the traffic channel stream is intended for a particular MS, the preamble is MS specific.

In an exemplary embodiment, a control channel is transmitted at a fixed rate of 76.8 kbps and the control channel is time division multiplexed on the forward link. Because the control channel messages are directed to all MS, the control channel's preamble is recognizable by all the MS.

FIG. 3 is an exemplary flowchart of a method for a BS using QARQ to transmit or retransmit a packet to a MS. At step 300, the BS receives a payload unit intended for transmission to a MS.

At step 302 the BS determines whether the payload unit is a payload unit to be transmitted or a payload unit to be retransmitted. As discussed with reference to FIG. 1, the retransmission request can be initiated only by the RLP at this step.

If the payload unit is to be transmitted, the method continues in step 304, in which the payload unit is provided to a first time queue.

If the payload unit is to be retransmitted, the method continues in step 306, in which the payload unit is provided to a first time queue.

At step 308, the BS assembles payload units intended for a particular MS to a packet a structure of which is determined in accordance with a transmission data rate. The data rate at which the packet is sent is based on a feedback signal received over the reverse link from the destination MS. If the data rate is small, then the packet (called a multiple-slot packet) of data is transmitted in multiple forward link time slots. In an exemplary embodiment, a preamble is transmitted within a new packet. The preamble enables identification of the intended destination MS during decoding. In an exemplary embodiment, only the first time slot of the multiple-slot packet is transmitted with the preamble. The preamble could alternatively be transmitted in every forward link time slot.

At step 310, the BS transmits the packet in accordance with a scheduler order as discussed with reference to FIG. 1.

After the packet has been transmitted, the BS tests at step 312 if a SA corresponding to the transmitted packet was received. As disclosed with reference to FIG. 6, the BS has a knowledge, when to expect the SA.

If an ACK is received (or a NAK is not received) in the expected time slot, the method continues at step 314. At step 314, the packet is removed from the first time and the retransmission queues, and the packet is discarded.

5 If a NAK is received (or an ACK is not received) in the expected time slot, the method continues at step 316. At step 316, parameters controlling retransmission are tested. The parameters assure that a particular packet will not be retransmitted repeatedly, thus increasing buffer requirements and decreasing throughput of a communication system. In one
10 embodiment, the parameters comprise, e.g., maximum number of times a packet can be retransmitted and maximum time for which a packet can remain in the first-time queue after the packet has been transmitted. If the parameters were exceeded, the packet is removed from the first time and the retransmission queues, and the packet is discarded at step 318. In this
15 scenario, the QARQ retransmission processing ends and the packet may be retransmitted upon request from the RLP processor as discussed with reference to FIG. 6. If the parameters were not exceeded, the packet is rescheduled for retransmission at step 320.

20 FIG. 4 is an exemplary flowchart of a method for a MS using QARQ to generate a response to a BS. At step 400, the MS receives a packet from the BS.

At step 402, the preamble of the packet is extracted. The preamble is compared with a reference preamble at step 404. The packet is discarded if the preamble indicates that the packet is intended for another MS at step 406
25 and the flow returns to step 400 to wait for another packet. If the preamble indicates that the packet is intended for the MS, the MS decodes the packet and evaluates a quality metric of the received packet is at step 408.

At step 410, the evaluated quality metric and the quality metric contained in the received packet are compared. If the evaluated quality
30 metric and the quality metric contained in the received packet do not match, an appropriate SA is sent at step 412. In the exemplary embodiment, the SA is a NAK, represented by a bit of non-zero energy. A timer for the SA sent is started at step 414. The purpose of the timer is to limit a period for which the MS waits for retransmission of the payload units of the incorrectly
35 decoded packet. In the exemplary embodiment, if the payload units of the incorrectly decoded packet are not received within the timer expiration period for the NAK, associated with the incorrectly decoded packet, the

QARQ processing is aborted, and the RLP handles the missing payload units. See steps 416 – 432 and accompanying description.

If a packet was correctly decoded at step 410, an appropriate SA is sent at step 416. In an exemplary embodiment, the SA is a bit of no energy. The payload unit(s) contained in the packet are then stored in a buffer at step 418.

At step 420, the RLP sequence number of the payload units is tested against expected values of the RLP sequence number.

If the RLP sequence number indicates contiguity, it means that all the payload units of the packet transmitted to the MS were properly received. Consequently, all the payload units with contiguous sequence numbers contained in the buffer are provided to an RLP layer at step 420.

If the RLP sequence number indicates non-contiguity, the timer, corresponding to the last NAK sent (which was started at step 414), is checked at step 422. If the timer has not expired, the MS waits for retransmission of the missing payload units or expiration of the timer for the last NAK sent.

If the timer for a particular NAK, and, consequently a particular set of missing payload unit expired, the QARQ scheme for these payload units is aborted. All payload units stored in the buffer with sequence number higher than the missing payload units associated with the particular NAK and lower than the missing units associated with the next NAK (if any) are provided to an RLP layer at step 424.

At step 426, the RLP layer checks the sequence numbers of the delivered payload units. If the sequence number indicates contiguity, the RLP layer delivers data from the buffer to a data sink at step 428. Otherwise, the RLP layer generates RLP message requesting retransmission of the missing units at step 430. In one embodiment of the invention, the RLP message requests retransmission of all of the missing units in the buffer. In another embodiment, the message requests retransmission of only the latest detected missing payload units.

At step 432, the message is transmitted over the reverse link to the serving BS.

FIG. 5 shows a detailed block diagram of the communication system 100 of FIG. 1. Data to be delivered to the MS 106 arrive at the BSC 102 through the connection 112 from the PSDN (not shown). The data are formatted into payload units under the control of a RLP processor 504. Although an RLP processor is shown in the embodiment, other protocols, allowing retransmission based on sequence number methods can be

utilized. In one embodiment of the invention, the payload unit is 1024 bits long. The RLP processor 504 also supplies a distributor 502 with information as to which packets have been requested for retransmission. The retransmission request is delivered to the RLP processor 504 through the
5 RLP message. The distributor 502 distributes payload units through a backhaul to the BS, which serves the MS for which the data are intended. The distributor 502 receives information about location of the MS from the BS which serves the MS through the backhaul.

The payload units that arrived at the BS 104 through the backhaul 110
10 are provided to a distributor 506. The distributor 506 tests whether the payload units are new payload units or payload units provided by the RLP processor 504 for retransmission. If the payload units are to be retransmitted, the payload units are provided to a retransmission queue 510. Otherwise, the payload units are provided to a first time queue 508. The
15 payload units are then assembled into packets in accordance with a data rate requested by the MS 106, as described with reference to FIG. 1.

Assembled packets are provided to a scheduler 512. The scheduler 512 cooperates with a QARQ controller 518 on assigning priority between the first time packets and the packets intended for retransmission to the MS 106.
20 The packet transmitted to the MS 106 remains in the queues 508, 510, while the BS 104 waits for a SA from the MS 106.

The packets arriving at the MS 106 over the forward link 108a are provided to a preamble detector 520, which detects and decodes a preamble of the packets. The preamble is provided to a processor 521, which compares
25 the decoded preamble to a reference preamble. The packet is discarded if the preamble indicates that the packet is intended for another MS; otherwise, the packet is provided to a decoder 522, which decodes the packet. The decoded packet is provided to a processor 521, which evaluates a quality metric of the packet. The evaluated quality metric and the quality metric
30 contained in the received packet are compared, and based on the comparison an SA generator 526 generates an appropriate SA. Though the preamble detector 520, the decoder 522, and the processor 521 are shown as separate elements, one skilled in the art will appreciate that the physical distinction is made for explanatory purposes only. The preamble detector 520, the decoder
35 522, and the processor 521 may be incorporated into single processor accomplishing the above-mentioned processing.

If a packet was incorrectly decoded, i.e., the evaluated quality metric and the quality metric contained in the received packet do not match, the SA

is sent and a timer 530 for the SA is started. In the exemplary embodiment, the SA is a NAK represented by a bit of non-zero energy. The purpose of the timer 530 is to limit a period, for which the MS 106 waits for retransmission of the payload units of the incorrectly decoded packet. If the payload units of the incorrectly decoded packet are not received within the timer 530 expiration period for the NAK associated with the incorrectly decoded packet, the QARQ processing is aborted. A retransmission of the missing payload units is handled by an RLP.

If a packet was correctly decoded, the payload unit(s) contained in the packet are stored in a buffer 528. The RLP sequence number of the payload unit(s) contained in the packet is checked by the decoder 522 against an expected value of the RLP sequence number. If the RLP sequence number indicates contiguity, all the payload units with contiguous sequence numbers contained in the buffer 528 are provided to a RLP processor 526. Otherwise, the timer 530, corresponding to the last NAK sent, is checked. If the time has not expired, the payload units are stored in the buffer 528, and the MS 106 waits for retransmission of the missing payload units or expiration of the timer 530 for the last NAK sent. If the timer 530 for a particular NAK, and, consequently a particular set of missing payload unit expired, all payload units in the buffer 528 with sequence number higher than the missing units associated with the particular NAK and lower than the missing units associated with the next NAK – if any – are provided to a RLP processor 526.

The RLP processor 526 checks the sequence numbers of the delivered payload units. If the sequence number indicates contiguity, the RLP processor 524 delivers data from the buffer 528 to the data sink 534. Otherwise, the RLP processor 526 instructs RLP message generator 532 to generate RLP message requesting retransmission of the missing units. In one embodiment of the invention, the RLP message requests retransmission of all of the missing units in the buffer 528. In another embodiment, the message requests retransmission of only the latest detected missing payload units. The message is then transmitted over the reverse link 108b to the BS 104.

The data containing a SA and an arriving at the BS 104 over the reverse link are provided to a SA detector 514 and an RLP message detector 516.

If the received data contain an ACK, which is detected in a SA detector 514, the QARQ controller 518 removes the packet associated with the ACK from the queues 508, 510.

5 If a NAK is received, the QARQ controller 518 checks whether parameters controlling retransmission were exceeded. In the exemplary embodiment, the parameters comprise maximum number of times a packet can be retransmitted and maximum time for which a packet can remain in the first-time queue 508 after the packet has been transmitted. If the parameters were exceeded, the QARQ controller 518 removes the packet
10 form the queues 508 and 510. Otherwise, the QARQ controller 518 instructs the scheduler 512 that the packet be rescheduled for transmission with higher priority. The packet is moved from the first-time queue 508 to the retransmission queue 510, if the QARQ controller 518 determines that the non-acknowledged packet resides in the first time queue 510.

15 If the received data contain an RLP retransmission request, which is detected by an RLP message detector 516, the detector 516 provides the RLP message to the RLP processor 504 through the backhaul 110. The RLP processor then initiates procedure for re-transmitting the packet in accordance with the RLP implemented.

20 FIG. 6 illustrates a relationship between a packet received at a MS 106 and a SA transmitted from the MS 106. In slots $n-4$, $n-3$, a receiver at the MS 106 receives a packet over the forward channel link 108, and determines if the packet was intended for the MS 106. The MS 106 discards the packet if the packet was not intended for the MS 106. Otherwise, the MS 106 decodes
25 the packet, evaluates a quality metric of the packet, and compares the evaluated quality metric with the quality metric contained in the packet in slots $n-2$, $n-1$. In slot n , a transmitter at the MS 106 sends a SA back to the BS 104 over the reverse channel link 108b. In slot $n+1$, the SA received at the BS 104 is decoded and provided to a QARQ controller. In slots $n+2$, $n+3$ the
30 BS 104 retransmits the packet if so requested. The position of the slots on the received forward link channel 108a and the reverse link channel 108b is synchronized at the MS 106. Therefore, the relative position of slots on the forward channel link 108a and the reverse channel link 108b is fixed. The BS 104 can measure a round trip delay between the BS 104 and the MS 106.
35 Consequently, the time slot in which the SA must arrive at the BS 104 can be ascertained, provided that a relation between the received packet processing and the SA is determinable.

In one embodiment of the invention, the relation between the received packet processing and the SA is determinable by fixing the number of slots between receiving a packet and sending a SA back, i.e., slots $n-2$, $n-1$. Consequently, the BS 104 can associate each packet with each SA. One skilled in the art will understand, that FIG. 5 is meant only to illustrate the concept. Consequently, the number of slots allocated for a particular event may change, e.g., decoding and evaluating of a packet's quality metric may occur in more or less than two slots. Furthermore, certain events are inherently variable, e.g., length of a packet, delay between the SA reception and the packet retransmission.

In another embodiment of the invention, the relation between the received packet processing and the SA is determinable by including information which packet is to be retransmitted into the SA.

The previous description of the preferred embodiments is provided to enable any person skilled in the art to make or use the present invention. The various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of the inventive faculty. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

What is claimed is:

CLAIMS

1. A method for retransmitting signals in a communication system,
2 comprising the steps of:
determining a quality metric of a unit of received signal; and
4 requesting retransmission of said unit of signal in accordance with
said quality metric.
2. The method of claim 1 wherein the unit of signal is a packet.
3. The method of claim 1 wherein the quality metric is a cyclic
2 redundancy check.
4. The method of claim 1 wherein the step of determining a quality
2 metric comprises the steps of:
demodulating said unit of signal; and
4 computing a quality metric of said unit of signal.
5. The method of claim 4 further comprising the step of determining if
2 the unit of signal is to be demodulated.
6. The method of claim 5 wherein the step of determining is carried out
2 in accordance with a preamble of said unit of signal.
7. The method of claim 5 wherein the step of determining is carried out
2 in accordance with information carried on a control channel.
8. The method of claim 4 wherein the step of demodulating does not
2 require information carried on a control channel.
9. The method of claim 4 wherein the step of demodulating requires
2 information carried on a control channel.
10. The method of claim 1 wherein the step of requesting retransmission
2 comprises the steps of:
comparing said determined quality metric of said unit of signal with a
4 quality metric contained in said unit of signal; and
generating a retransmission request based on said comparison.

11. The method of claim 10 wherein said retransmission request is a burst
2 of energy.

12. The method of claim 11 wherein said burst of energy is a bit.

13. The method of claim 10 wherein said retransmission request contains
2 no energy.

14. The method of claim 13 wherein said retransmission request is a bit.

15. The method of claim 10 further comprising the step of transmitting
2 said retransmission request at a determinable time instant.

16. The method of claim 15 wherein said determinable time instant is
2 fixedly delayed from an event time instant, said event time instant being
selected from a group consisting of:

- 4 a time instant when said unit of signal is received;
- a time instant when said determination if said unit of signal is to be
- 6 demodulated is made;
- a time instant when said unit of signal is demodulated; and
- 8 a time instant when said quality metric is computed.

17. The method of claim 1 further comprising the step of requesting
2 retransmission of said unit of signal in accordance with a sequence number
of said unit of signal when said retransmission of said signal in accordance
4 with said quality metric is declared a failure.

18. The method of claim 17 further comprising the steps of declaring said
2 retransmission of said signal in accordance with said quality metric a failure
when:
4 said unit of signal is not received within a predetermined number of
retransmissions; or
6 said unit of signal is not received within a predetermined period
measured from a first transmission of said unit of signal; or
8 said unit of signal is not received within a predetermined period
measured from transmission of a retransmission request corresponding to
10 said unit of signal.

19. A method for retransmitting signals in a communication system
2 comprising the steps of:
determining a quality metric of a unit of received signal;
4 requesting retransmission of said unit of signal in accordance with
said quality metric; and
6 retransmitting said unit of signal in accordance with said
retransmission request.
20. The method of claim 19 wherein the unit of signal is a packet.
21. The method of claim 19 wherein the quality metric is a cyclic
2 redundancy check.
22. The method of claim 19 wherein the step of determining comprises
2 the steps of:
demodulating a unit of signal; and
4 computing a quality metric of said unit of signal.
23. The method of claim 22 further comprising the step of determining if
2 the unit of signal is to be demodulated.
24. The method of claim 23 wherein the step of determining is carried
2 out in accordance with a preamble of said unit of signal.
25. The method of claim 23 wherein the step of determining is carried
2 out in accordance with information carried on a control channel.
26. The method of claim 22 wherein the step of demodulating does not
2 require information carried on a control channel.
27. The method of claim 22 wherein the step of demodulating requires
2 information carried on a control channel.
28. The method of claim 19 wherein the step of requesting
2 retransmission comprises the steps of:
comparing said determined quality metric of said unit of signal with a
4 quality metric contained in said unit of signal; and

generating a retransmission request based on said comparison.

29. The method of claim 28 wherein said retransmission request is a burst
2 of energy.

30. The method of claim 29 wherein said burst of energy is a bit.

31. The method of claim 28 wherein said retransmission request contains
2 no energy.

32. The method of claim 31 wherein said retransmission request is a bit.

33. The method of claim 19 further comprising the step of transmitting
2 said retransmission request at a determinable time instant.

34. The method of claim 33 wherein said determinable time instant is
2 fixedly delayed from an event time instant, said event time instant being
selected from a group consisting of:

- 4 a time instant when said unit of signal is received;
- a time instant when said determination if said unit of signal is to be
- 6 demodulated is made;
- a time instant when said unit of signal is demodulated; and
- 8 a time instant when said quality metric is computed.

35. The method of claim 19 further comprising the step of requesting
2 retransmission of said unit of signal in accordance with a sequence number
of said unit of signal when said retransmission of said signal in accordance
4 with said quality metric is declared a failure.

36. The method of claim 35 further comprising the steps of declaring said
2 retransmission of said signal in accordance with said quality metric a failure
when:

- 4 said unit of signal is not received within a predetermined number of
retransmissions; or
- 6 said unit of signal is not received within a predetermined period
measured from a first transmission of said unit of signal; or

8 said unit of signal is not received within a predetermined period
measured from transmission of a request signal corresponding to said unit
10 of signal.

37. The method of claim 19 wherein the step of retransmitting comprises
2 the steps of:

 determining a unit of signal to be retransmitted in accordance to
4 retransmission request signal; and
 scheduling said unit of signal for retransmission.

38. The method of claim 37 wherein the step of determining comprises
2 the step of selecting a unit of signal which was transmitted at a time instant
preceding a time instant of receiving said retransmission request by a sum
4 of a round trip delay and a determinable delay.

39. The method of claim 38 wherein the determinable delay is contained
2 in the retransmission request.

40. The method of claim 38 wherein the determinable delay is a
2 difference between a first time instant of transmitting said retransmission
request and a second time instant said second time instant being selected
4 from a group consisting of:

 a time instant when said unit of signal is received;
6 a time instant when said determination if said unit of signal is to be
demodulated is made;
8 a time instant when said unit of signal is demodulated; and
 a time instant when said quality metric is computed.

41. The method of claim 37 wherein the step of scheduling comprises the
2 step of determining a time instant at which to retransmit said unit of
signal, said time instant being variably delayed from receipt of said request
4 signal.

42. The method of claim 37 wherein the step of scheduling comprises the
2 step of determining a time instant at which to retransmit said unit of
signal, said time instant being fixedly delayed from receipt of said request
4 signal.

43. A method for retransmitting signals in a communication system
2 comprising the steps of:
receiving a retransmission request;
4 selecting a unit of signal which was transmitted at a time instant
preceding a time instant of receiving said retransmission request by a sum of
6 a round trip delay and a determinable delay; and
scheduling said unit of signal for retransmission.
44. The method of claim 43 wherein the determinable delay is contained
2 in the retransmission request.
45. The method of claim 43 wherein the determinable delay is a
2 difference between a first time instant of transmitting said retransmission
request and a second time instant said second time instant being selected
4 from a group consisting of:
a time instant when said unit of signal is received;
6 a time instant when said determination if said unit of signal is to be
demodulated is made;
8 a time instant when said unit of signal is demodulated; and
a time instant when said quality metric is computed.
46. The method of claim 43 wherein the step of scheduling comprises the
2 step of determining a time instant at which to retransmit said unit of
signal, said time instant being variably delayed from receipt of said request
4 signal.
47. The method of claim 43 wherein the step of scheduling comprises the
2 step of determining a time instant at which to retransmit said unit of
signal, said time instant being fixedly delayed from receipt of said request
4 signal.
48. An apparatus configured to retransmit signals in a communication
2 system, comprising:
a decoder configured to decode contents of a unit of received signal;
4 a first feedback signal generator configured to generate a first feedback
signal; and

6 a first processor configured to determine a quality metric of said unit
of signal; and instruct said feedback signal generator to generate a
8 feedback signal in accordance with said quality metric.

49. The apparatus of claim 48 wherein the unit of signal is a packet.

50. The apparatus of claim 48 wherein the quality metric is a cyclic
2 redundancy check.

51. The apparatus of claim 48 wherein said first processor is further
2 configured to prevent decoding of said unit of signal if an indication
received on a control channel indicates that said unit of signal is not to be
4 decoded.

52. The apparatus of claim 48 further comprising:
2 a preamble detector configured to detect and decode a preamble of said
unit of signal; and wherein said first processor is further configured to
4 prevent decoding of said unit of signal if said preamble indicates that said
unit of signal is not to be decoded.

53. The apparatus of claim 48 wherein said decoder decodes contents of
2 said unit of signal in accordance with information carried on a control
channel.

54. The apparatus of claim 48 wherein said first feedback signal is a burst
2 of energy.

55. The apparatus of claim 54 wherein said burst of energy is a bit.

56. The apparatus of claim 48 wherein said first feedback signal contains
2 no energy.

57. The apparatus of claim 56 wherein said first feedback signal is a bit.

58. The apparatus of claim 48 wherein the first processor is further
2 configured to transmit said first feedback signal at a determinable time
instant.

59. The apparatus of claim 58 wherein said determinable time instant is
2 fixedly delayed from an event time instant, said event time instant being
selected from a group consisting of:

- 4 a time instant when said unit of signal is received;
- a time instant when said determination if said unit of signal is to be
6 demodulated is made;
- a time instant when said unit of signal is demodulated; and
- 8 a time instant when said quality metric is computed.

60. The apparatus of claim 48 further comprising:

- 2 a second feedback signal generator for generating a second feedback
signal; and
- 4 a second processor configured to instruct said second feedback
generator to generate a second feedback signal in accordance with a sequence
6 number of said unit of signal when said retransmission of said signal in
accordance with said quality metric is declared a failure.

61. The apparatus of claim 60 further comprising the steps of declaring
2 said retransmission of said signal in accordance with said quality metric a
failure when:

- 4 said unit of signal is not received within a predetermined number of
retransmissions; or
- 6 said unit of signal is not received within a predetermined period
measured from a first transmission of said unit of signal; or
- 8 said unit of signal is not received within a predetermined period
measured from transmission of a request signal corresponding to said unit
10 of signal.

62. An apparatus for retransmission of signals in a communication
2 system, comprising:

- a data queue for storing a plurality of units of signal to be transmitted;
- 4 a scheduler for scheduling a transmission of said units of signal to a
destination receiving terminal;
- 6 a first detector for detecting a first feedback signal received from the
destination receiving terminal; and
- 8 a first control processor configured to receive said first feedback signal,
select a unit of signal which was transmitted at a time instant preceding a

10 time instant of receiving said first feedback signal by a sum of a round trip
delay and a determinable delay, and schedule said unit of signal for
12 retransmission.

63. The apparatus of claim 62 wherein the determinable delay is
2 contained in the first feedback signal.

64. The apparatus of claim 62 wherein the determinable delay is a
2 difference between a first time instant of transmitting said retransmission
request and a second time instant said second time instant being selected
4 from a group consisting of:



- a time instant when said unit of signal is received;
- 6 a time instant when said determination if said unit of signal is to be
demodulated is made;
- 8 a time instant when said unit of signal is demodulated; and
a time instant when said quality metric is computed

65. The apparatus of claim 62 wherein the first processor is further
2 configured to determine a time instant at which to retransmit said unit of
signal, said time instant being variably delayed from receipt of said first
4 feedback signal.

66. The apparatus of claim 62 wherein the first processor is further
2 configured to determine a time instant at which to retransmit said unit of
signal, said time instant being fixedly delayed from receipt of said first
4 feedback signal.

67. The apparatus of claim 62 further comprising:
2 a second detector for detecting a second feedback signal received from
the destination receiving terminal; and
4 a second control processor configured to receive said second feedback
signal, select a unit of signal in accordance with said second feedback signal,
6 and schedule said unit of signal for retransmission.

68. The apparatus of claim 67 wherein the second feedback signal
2 contains sequence numbers of said unit of signal to be retransmitted.

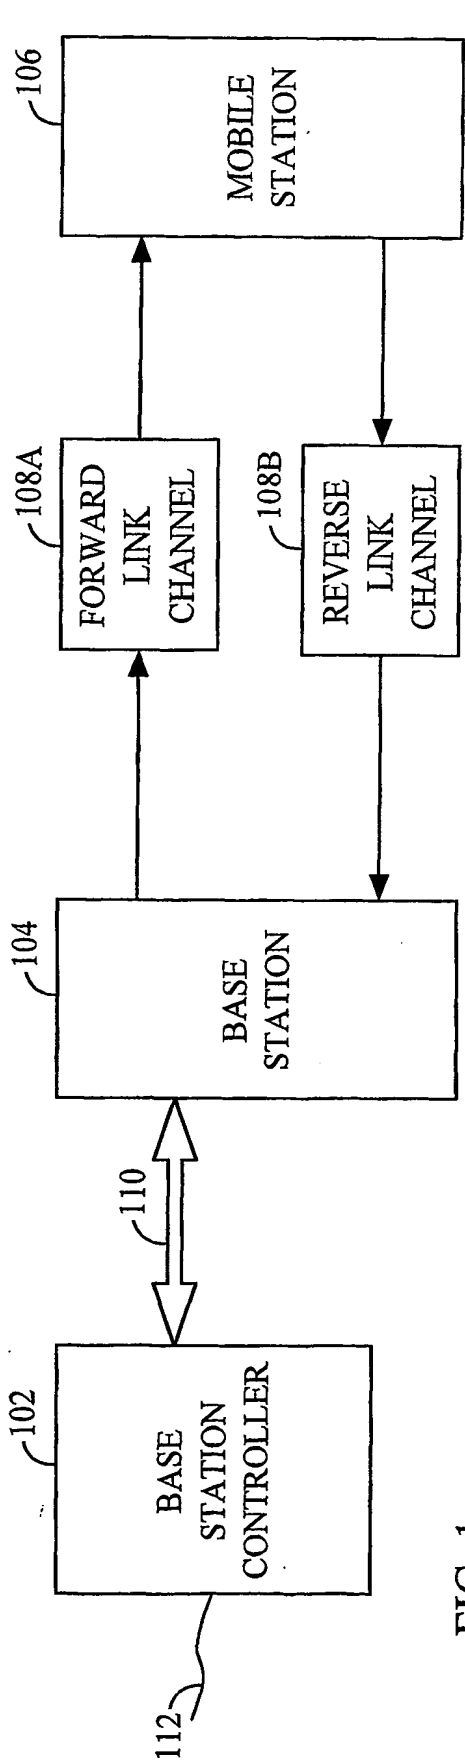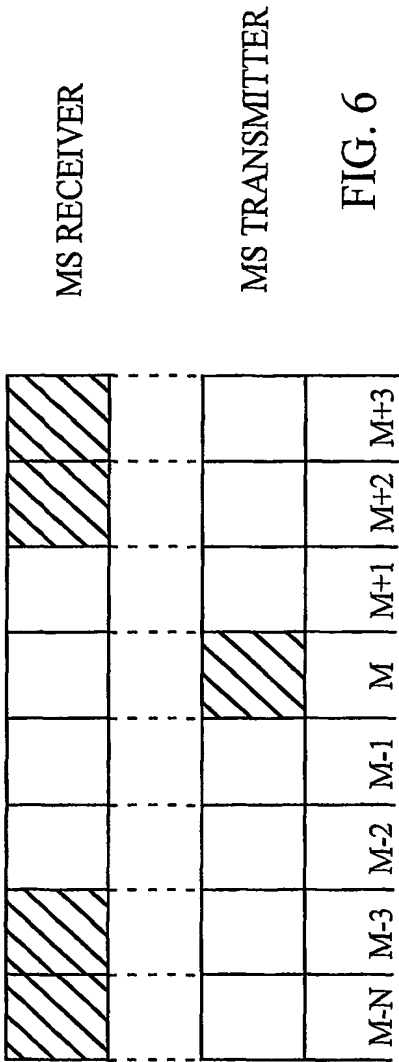

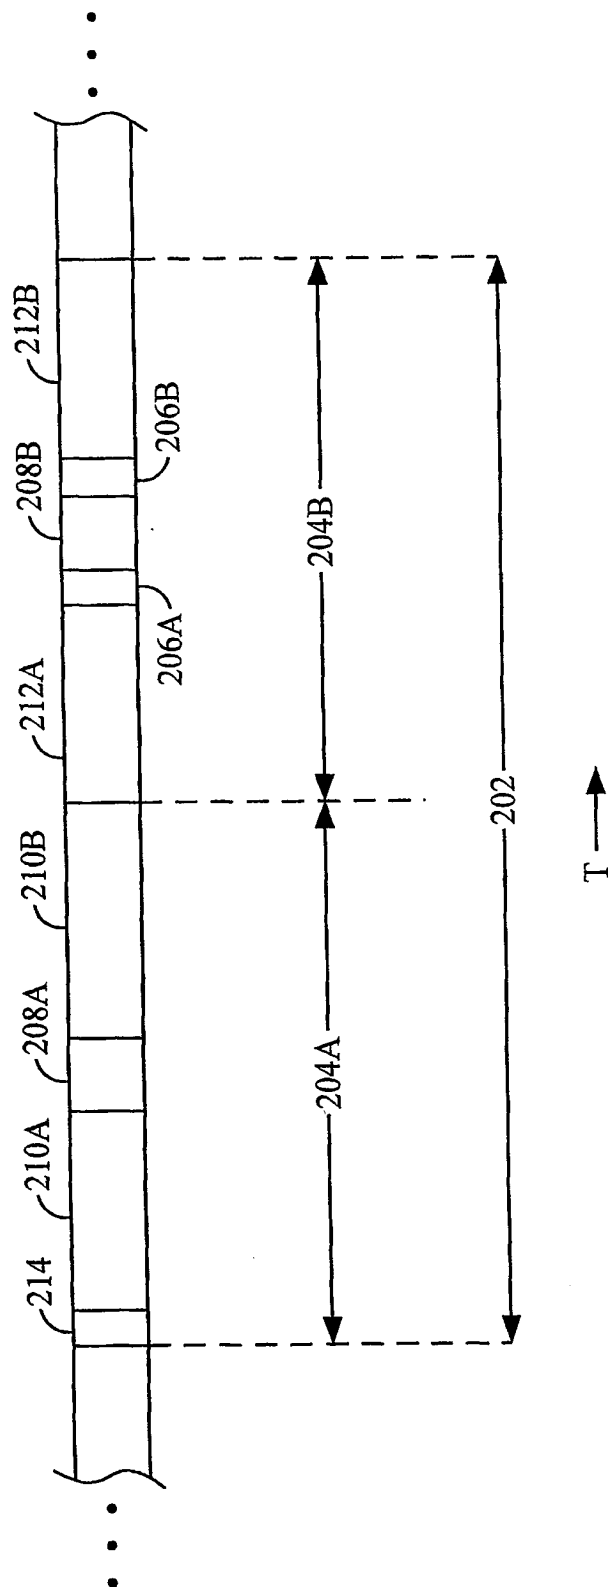


FIG. 2

3/5

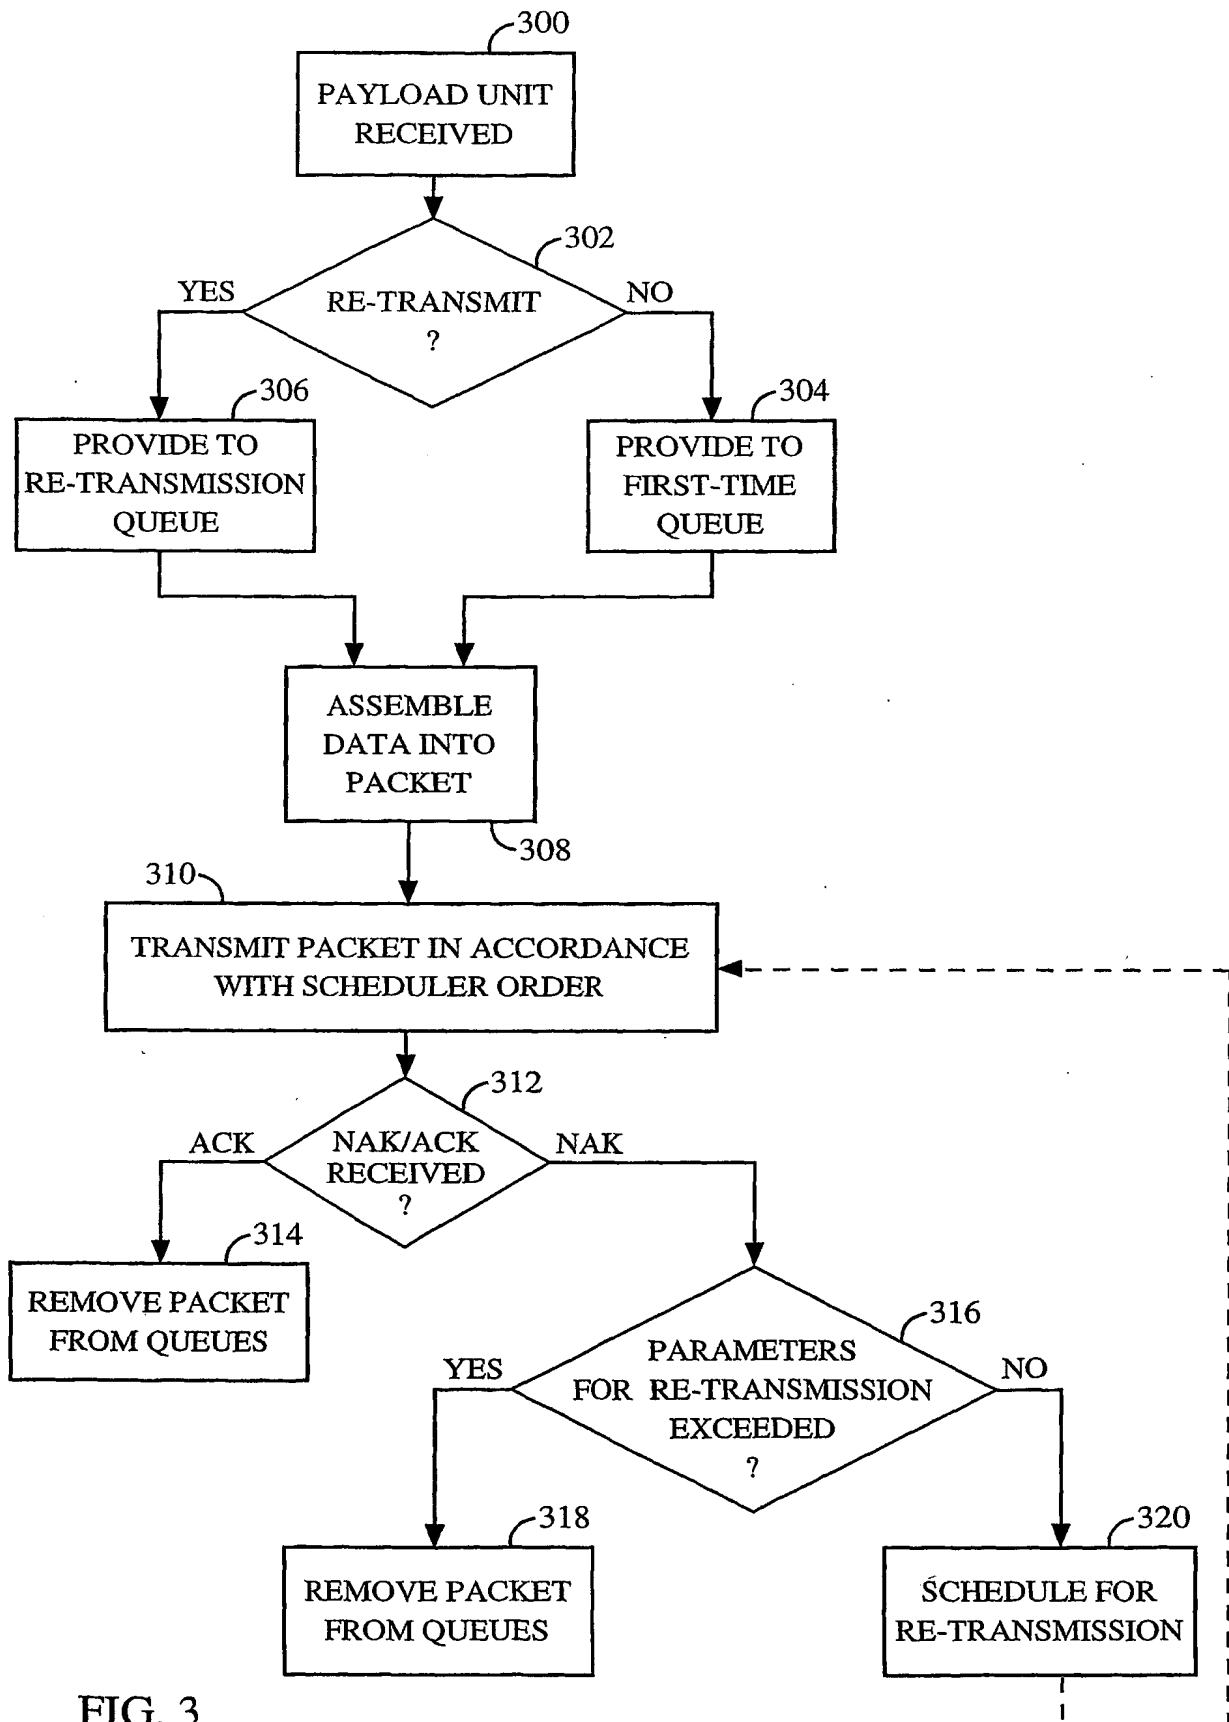


FIG. 3

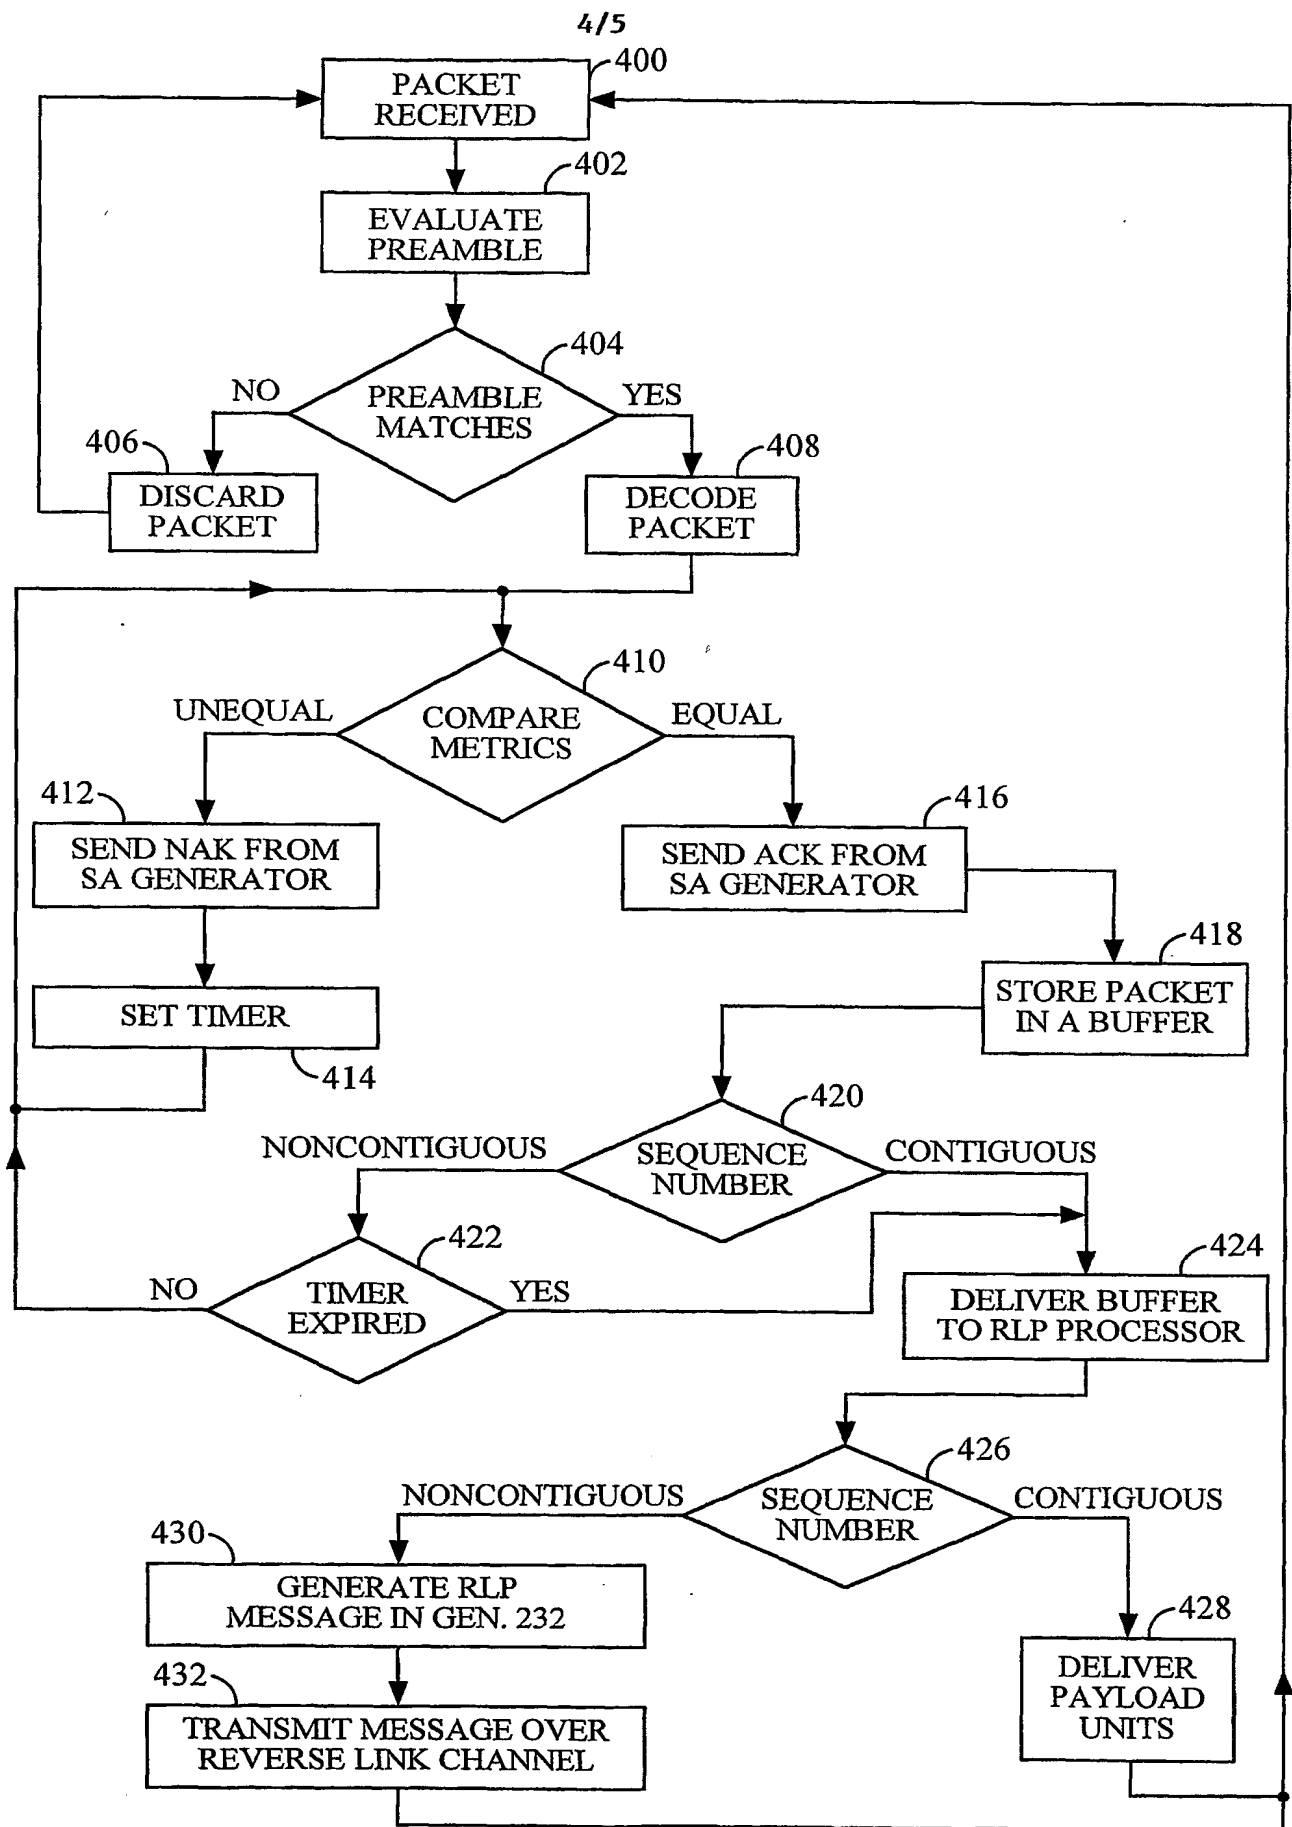


FIG. 4

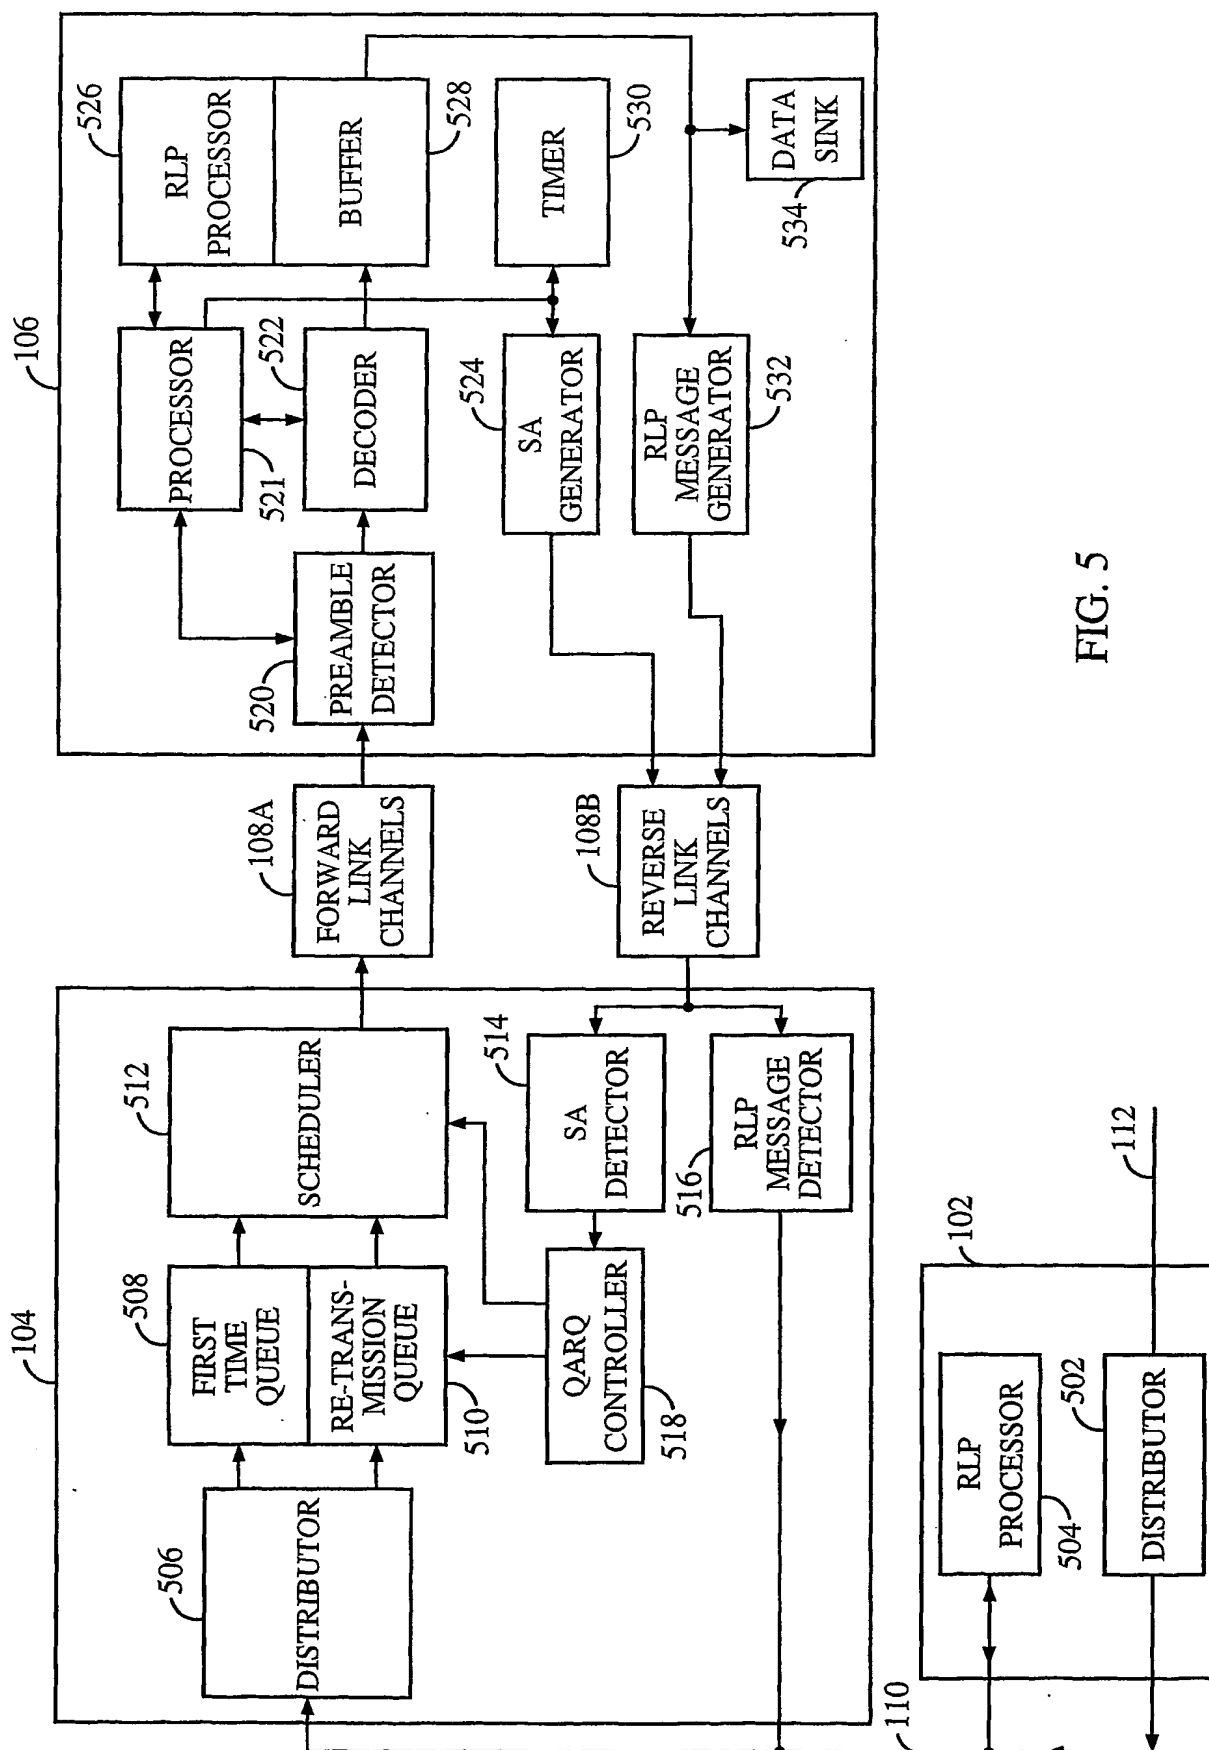


FIG. 5

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 01/12227

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L1/18 H04L1/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 677 918 A (CLANTON CHRISTOPHER LAMONTE ET AL) 14 October 1997 (1997-10-14) abstract column 2, line 37 - line 48 column 3, line 35 - line 65 figures 3-5	1-4, 10, 15, 16, 19-22, 28, 33, 34, 37, 38, 42, 43, 45, 47-50, 58, 59, 62, 64, 66
A		17, 18, 60, 61, 67, 68



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

28 September 2001

Date of mailing of the international search report

08/10/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Martínez Martínez, V

INTERNATIONAL SEARCH REPORT

Initial Application No
PCT/US 01/12227

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 771 092 A (NOKIA MOBILE PHONES LTD) 2 May 1997 (1997-05-02) page 4, line 31 - line 37; figure 6 -----	1,10,15, 16,33, 34,43, 45,47, 48,58, 59,62, 64,66
X	US 5 784 362 A (TURINA DALIBOR) 21 July 1998 (1998-07-21) column 5, line 26 - line 35 column 5, line 62 -column 6, line 63; figures 6,4A-4E -----	1-7, 9-14, 19-25, 27-32, 48,51-57

INTERNATIONAL SEARCH REPORT
Information on patent family members

In **original Application No**
PCT/US 01/12227

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5677918	A	14-10-1997	NONE	
EP 0771092	A	02-05-1997	EP US	0771092 A1 5946320 A
				02-05-1997 31-08-1999
US 5784362	A	21-07-1998	AU AU CA EP JP NO WO	707346 B2 5411196 A 2217059 A1 0821860 A1 11503891 T 974762 A 9633586 A1
				08-07-1999 07-11-1996 24-10-1996 04-02-1998 30-03-1999 11-12-1997 24-10-1996